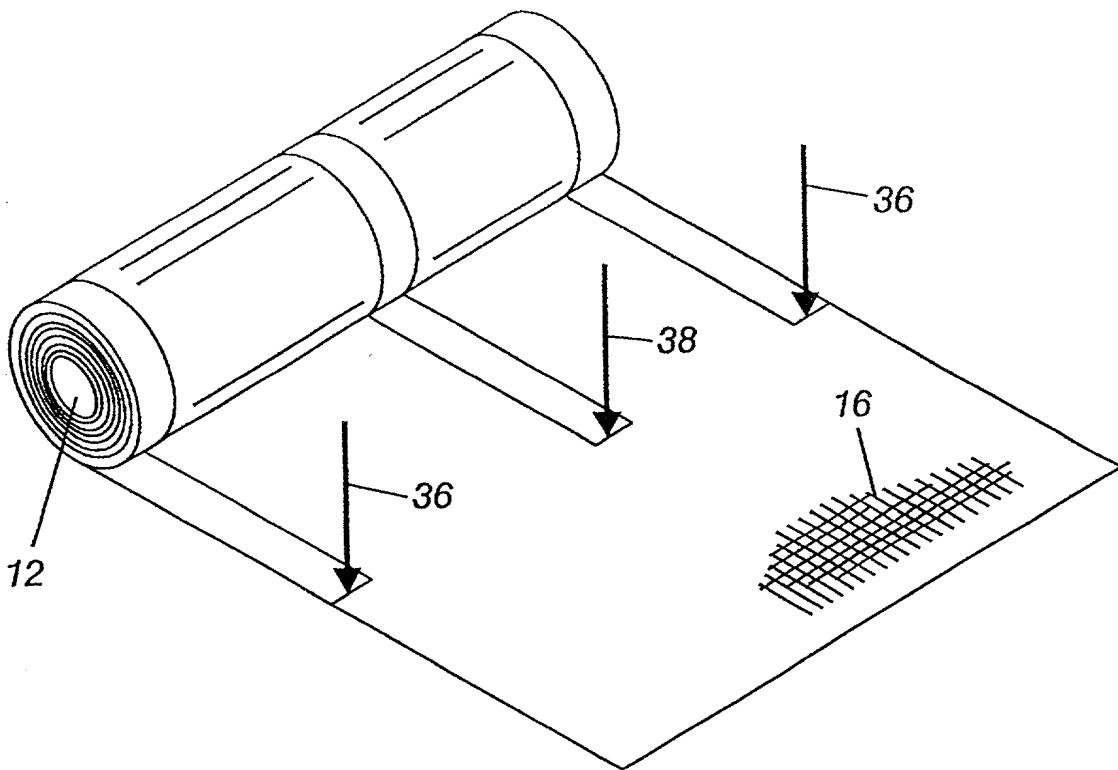


Fig.2



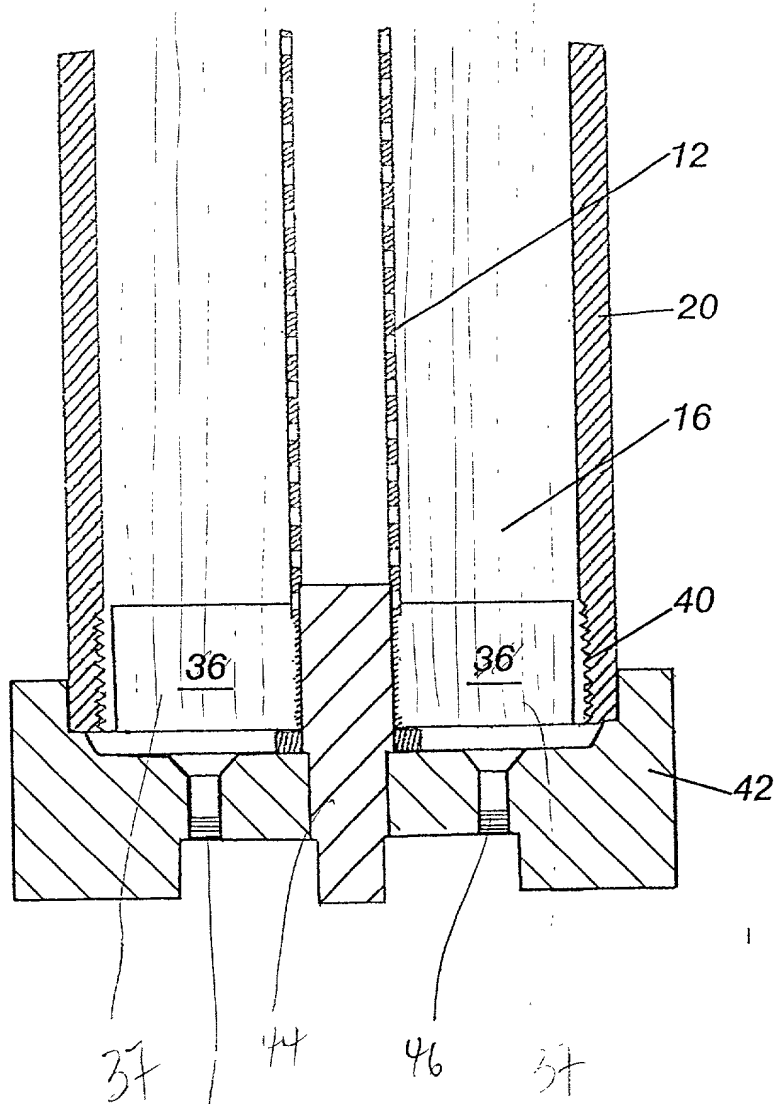


Fig. 3

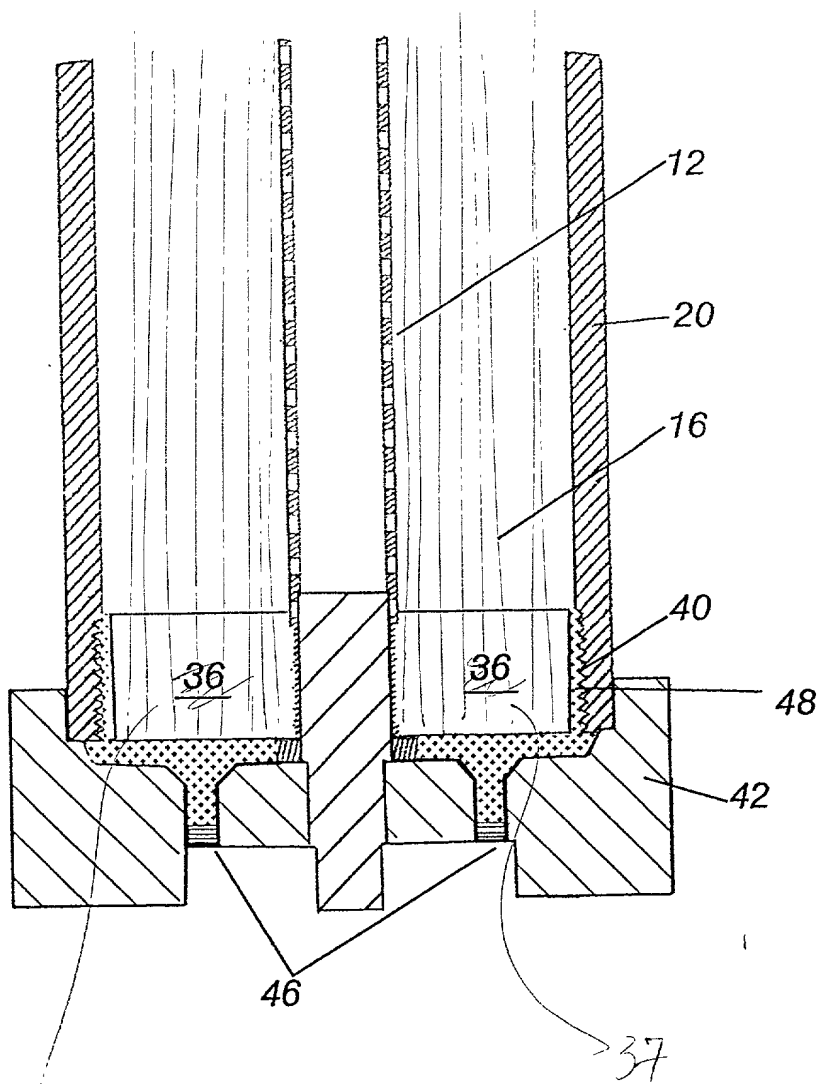


Fig. 4

any other suitable means for providing a light source, such as a light bulb, a laser, or a light emitting diode (LED), may be used. The light source may be positioned at the proximal end of the device, or it may be positioned at the distal end of the device. The light source may be positioned at any other suitable location along the length of the device.

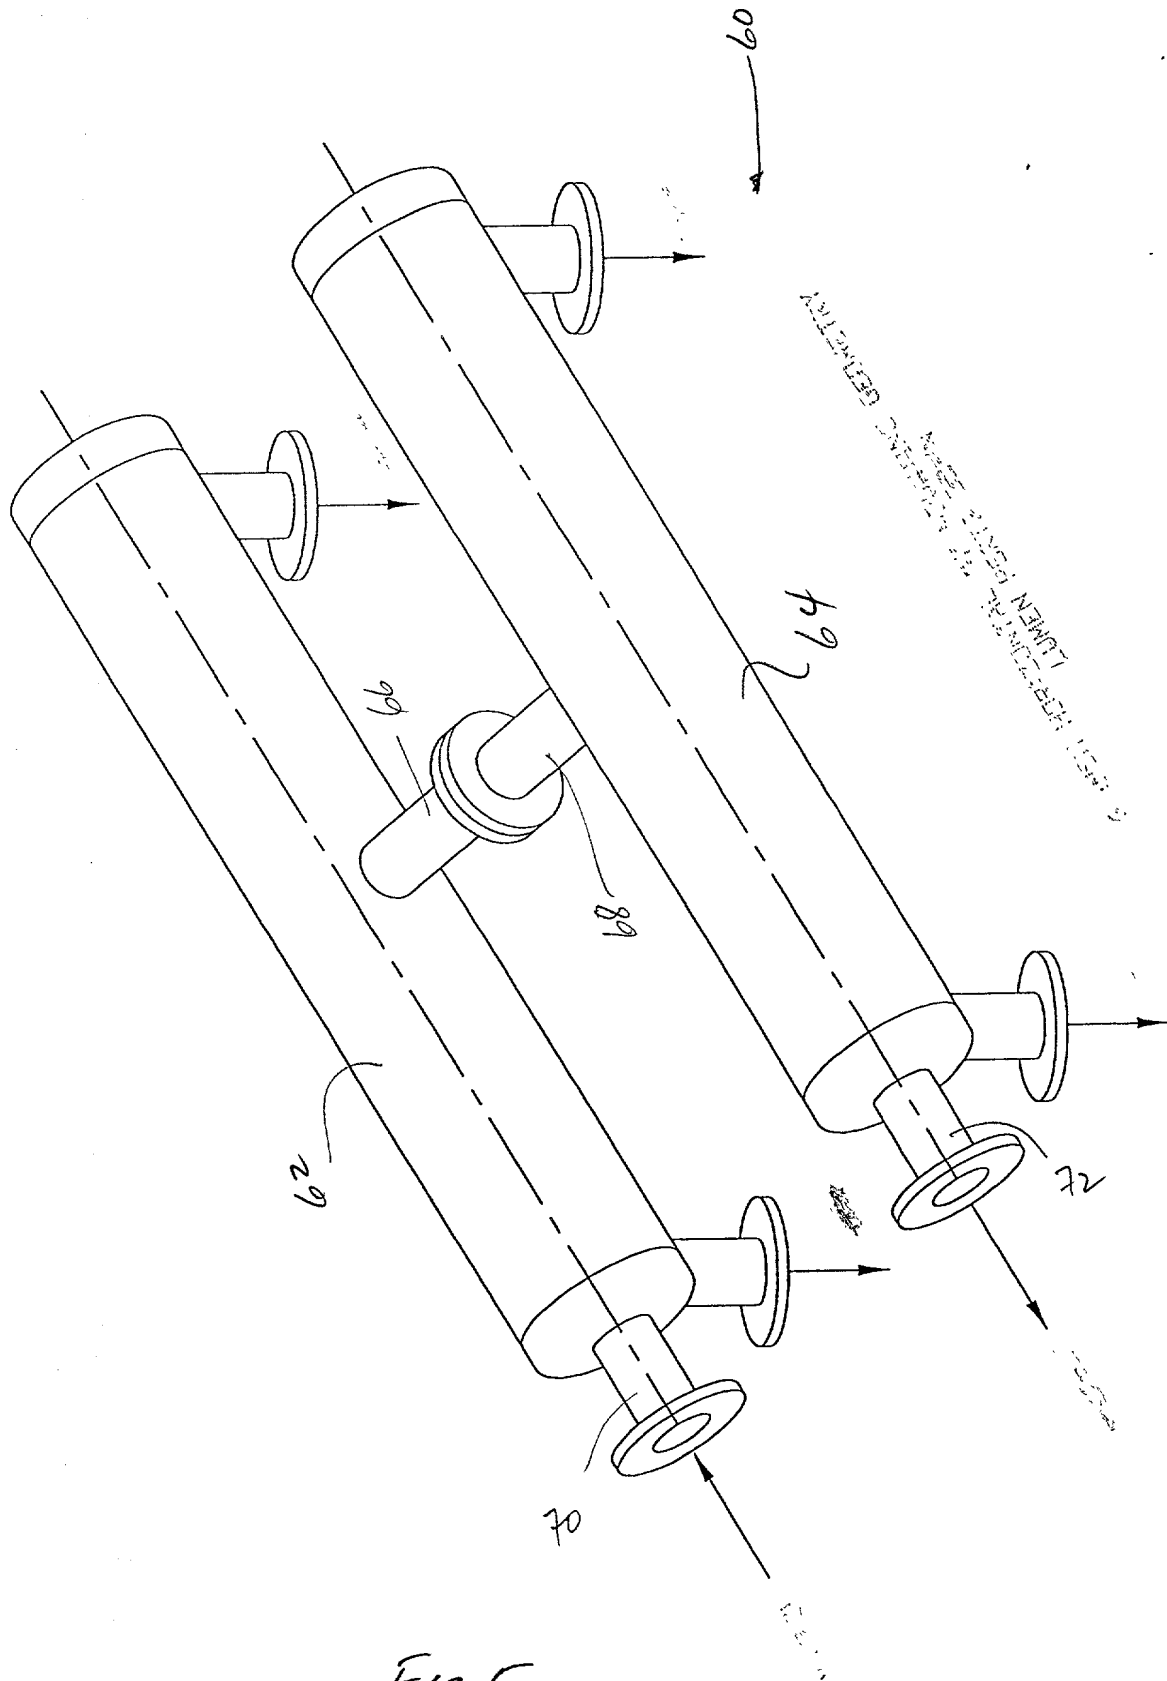


Fig 5